



AKK www.akktek.com

PRODUCT SPECIFICATION

4. Long-press the button for 5 second until digital display flicker. Then short-press the button to change the power, 25mW/50mW/200mW (one hyphen stands for 25mW, two hyphens stand for 50mW, and three hyphens stand for 200mW).
5. 5 seconds after setting, CH, FR and power will flicker alternately.

Notice: The vtx has memory for settings. To change the settings, please repeat steps as above.

Frequency and channel frequency table:


Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band-A	5865	5845	5825	5805	5785	5765	5745	5725
Band-b	5733	5752	5771	5790	5809	5828	5847	5866
Band-E	5705	5685	5665	5645	5885	5905	5925	5945
Band-F	5740	5760	5780	5800	5820	5840	5860	5880
Band-r	5658	5695	5732	5769	5806	5843	5880	5917



3-IN-1

Super Mini 5.8GHz 40CH FPV Transmitter + 600TVL FPV Camera + Antenna

0/25mW/50mW/200mW adjustable




Product Instruction Manual



www.akktek.com

PRODUCT SPECIFICATION

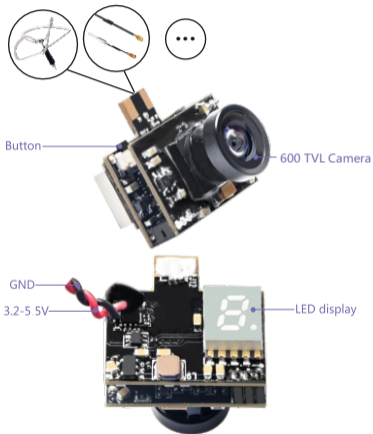

**Super Mini 5.8GHz 40CH FPV Transmitter
+ 600TVL FPV Camera + Antenna**



www.akktek.com

PRODUCT SPECIFICATION

Specification and Parameters:

- Output power: 0/25mW/50mW/200mW adjustable
(Set output power on 0, to avoid frequency interference)
- Input power: 3.2-5.5V
- Current consumption: 250mA-510mA(25mW)
270mA-640mA(50mW)
330mA-740mA(200mW)
- Camera resolution: 600TVL
- Video system: NTSC
- Mini illumination: 1 lux
- Field of view: 120° FOV 150°DFOV
- Antenna: Clover antenna/IPEX antenna.....
- Frequency: 5.8GHz 5 bands 40 channels,
with Raceband: 5658-5917 MHZ
- Size: 19.5*14mm(L*W)
- Weight: 5g

Operation Instruction:

1. Powering on the vtx, blue LED display 0, indicating the vtx is powered on, but it is in off status without any transmission.
2. Short-press the button to change channel (CH), digital display will change synchronously. Digital display changes cyclically from 1 to 8.
3. Long-press the button for 2 seconds until digital display flicker. Then short-press the button to change the frequency band (FR), digital display will change synchronously. Digital display changes cyclically from A、b、E、F、r.